


LKH-25, 50 Hz

Motor:	3000 rpm. synchron.
Tolerance:	±5%
Impeller, Max. dia.:	205 mm
Impeller, Min. dia.:	160 mm
Pump inlet, dia.:	76 mm, DN 80
Pump outlet, dia.:	63.5 mm, DN 65
Performance data refer to water at 20°C	




Note! The curves refer to motor: 15 kW, 2930 rpm. asynchr., 50 Hz. For smaller motors, reduce head (H) with 3%

DO NOT FORGET THE SAFETY FACTOR

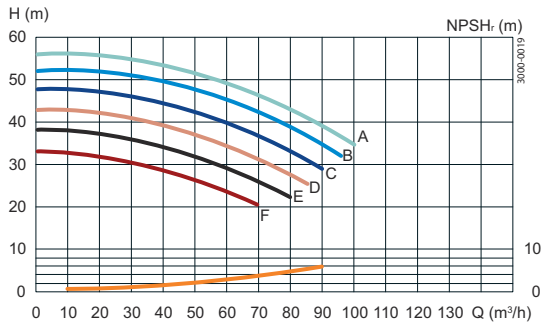

A = 205 D = 180
 B = 200 E = 170
 C = 190 F = 160

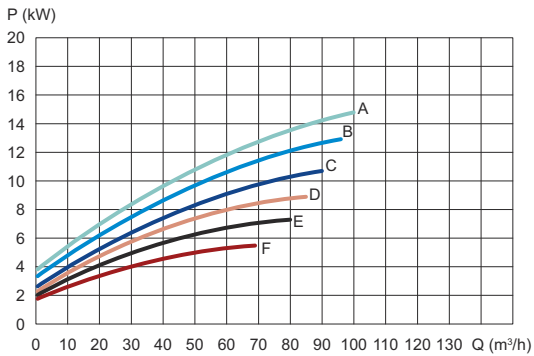


A = 205 D = 180
 B = 200 E = 170
 C = 190 F = 160

Motor:	1500 rpm. synchron.
Tolerance:	±5%
Impeller, Max. dia.:	205 mm
Impeller, Min. dia.:	160 mm
Pump inlet, dia.:	76 mm, DN 80
Pump outlet, dia.:	63.5 mm, DN 65
Performance data refer to water at 20°C	




Note! The curves refer to motor: 2.2 kW, 1430 rpm. asynchr., 50 Hz.

DO NOT FORGET THE SAFETY FACTOR

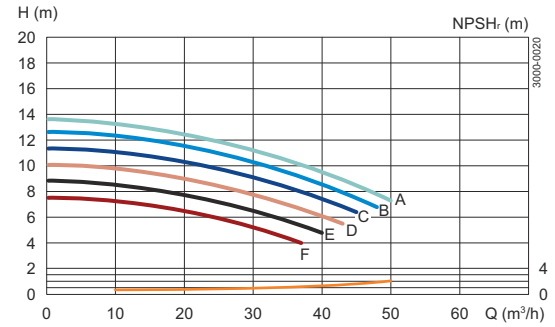

A = 205 D = 180
 B = 200 E = 170
 C = 190 F = 160

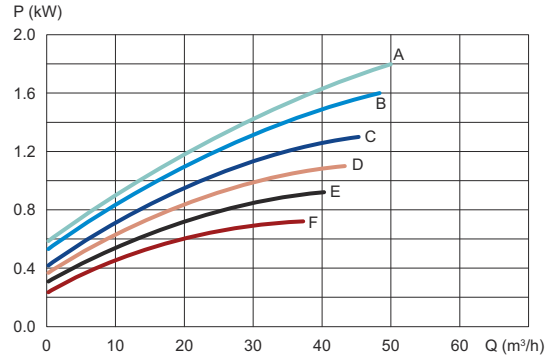

A = 205 D = 180
 B = 200 E = 170
 C = 190 F = 160